














Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 l / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
M132 A		1637	850	10	17.4	6.0	53	117	65	143	1,18
M132 W		1637	750	10	13.0	61.3	53	117	65	143	1,07

24h Produzione Ghiaccio - Ice Production

Raffreddamento ad aria - Air Cooled Unit


Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	120	137	140	143
50°	264	301	308	316
21°	104	118	124	128
70°	230	260	273	283
32°	89	100	102	105
90°	197	219	224	232
38°	75	83	90	93
100°	165	183	198	205

Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	117	124	127	129
50°	258	274	281	285
21°	105	115	120	122
70°	232	253	264	268
32°	97	105	111	113
90°	214	230	245	249
38°	95	103	109	110
100°	209	226	241	243



PANNELLO DI CONTROLLO - CONTROL PANEL

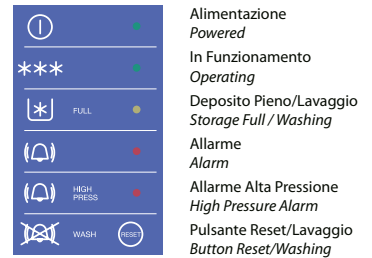


DIMENSIONI - DIMENSIONS

LxPxH(mm): 560 x 620 x 575
WxDxH(in): 22" x 24 7/16" x 22 10/16"

DEPOSITO - SLOPE BIN


D105-D155-D205-D255(KM205-255)

TIPO GHIACCIO - ICE TYPE




HALF-LARGE
10 x 29 x 24 - 6 gr

265
PZ. / CICLO PCS / CYCLE



DICE
22 x 22 x 24 - 10 gr

168
PZ. / CICLO PCS / CYCLE







LARGE
29 x 29 x 24 - 17 gr

110
PZ. / CICLO PCS / CYCLE

CONDIZIONI USO-OPERATING REQUIREMENTS




220-240V / 1 / 50Hz R452A GWP=2141

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 BAR (14 PSI)		5 BAR (70 PSI)


Calore espulso - Rejected Heat **1731 W**
Volume aria - Air Volume **590 m³/h**

Vista frontale
Front view




AIR COOLED

Vista laterale
Lateral view






WATER COOLED

Vista superiore
Top view



TOP VIEW



- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS
- G** Discharge line 1/2" male quick connection
- I** ON-OFF Switch (option)
- L** Line line 3/8" male quick connection
- P** High pressure reset (optional)
- R** Remote connection for condenser fans