















Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 l/h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
CS90 A ZP		1065	670	10	21.6	9.07	54	119	63	139	0
CS90 W ZP		1065	580	10	16,3	47,6	54	119	63	139	0




Produzione Ghiaccio - Ice Production


Raffreddamento ad aria - Air Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	79	82	84	86
50°	174	181	185	190
21°	74	77	79	81
70°	163	170	174	179
32°	62	65	67	68
90°	137	143	148	150
38°	51	54	56	58
100°	112	119	123	128


Raffreddamento ad acqua - Water Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
				
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	81	84	86	88
50°	179	185	190	194
21°	77	81	83	85
70°	170	179	183	187
32°	73	76	79	82
90°	161	168	174	181
38°	70	73	76	79
100°	154	161	168	174



Vista frontale Front view

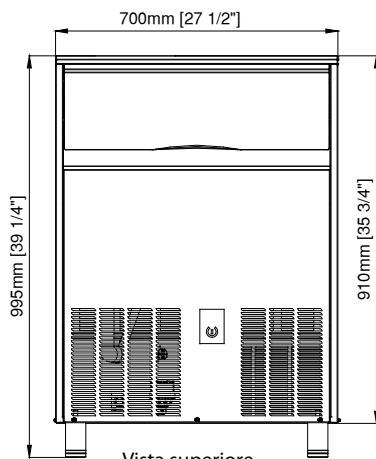


Vista superiore Top view



Vista laterale Lateral view

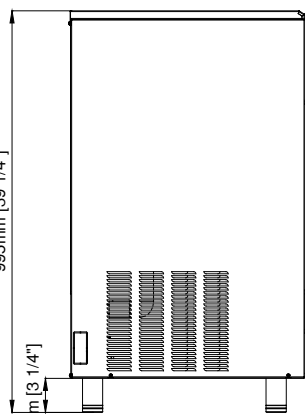

Kit 4 Feet Optional
 Kit 4 piedini Optional
 Ø50mm H100-120 mm



B Electrical cable supply / Ingresso alimentazione elettrica


C Water outlet connection / Attacco scarico acqua diam. 20 mm

D Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm

E Water inlet connection / Attacco entrata acqua - 3/4"gas



PANNELLO DI CONTROLLO - CONTROL PANEL




Interruttore capacitivo di start-standby
 Capacitive start-standby Switch
 Led di stato
 Status Led


CAPACITA' DEPOSITO - BIN CAPACITY

42 Kg - 93 lbs 2100 pcs


DIMENSIONI - DIMENSIONS

LxPxH (mm)

 700 x 580 x 995
 29" 9/16 x 23" 13/16 x 39" 3/16

 740 x 640 x 1080
 29" 2/16 x 25" 3/16 x 42" 8/16

TIPO GHIACCIO - ICE TYPE



20g
 WEIGHT ICE
 PESO GHIACCIO



56
 PCS / CYCLE
 PZ/CICLO

CONDIZIONI USO-OPERATING REQUIREMENTS

Calore espulso / Rejected Heat 1770 W





Volume aria / Air Volume 310 m³/h



220-240/50/1



R290 GWP = 3

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)