














## Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 I / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
<b>M132 A</b>		1637	850	10	17.4	6.0	53	117	65	143	1,18
<b>M132 W</b>		1637	750	10	13.0	61.3	53	117	65	143	1,07

## 24h Produzione Ghiaccio - Ice Production

### Raffreddamento ad aria - Air Cooled Unit







Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>120</b>	<b>137</b>	<b>140</b>	<b>143</b>
50°	264	301	308	316
21°	<b>104</b>	<b>118</b>	<b>124</b>	<b>128</b>
70°	230	260	273	283
32°	<b>89</b>	<b>100</b>	<b>102</b>	<b>105</b>
90°	197	219	222	232
38°	<b>75</b>	<b>83</b>	<b>90</b>	<b>93</b>
100°	165	183	198	205

### Raffreddamento ad acqua - Water Cooled Unit

Temp. aria Air Temp.	Temp. acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	<b>117</b>	<b>124</b>	<b>127</b>	<b>129</b>
50°	258	274	281	285
21°	<b>105</b>	<b>115</b>	<b>120</b>	<b>122</b>
70°	232	253	264	268
32°	<b>97</b>	<b>105</b>	<b>111</b>	<b>113</b>
90°	214	230	245	249
38°	<b>95</b>	<b>103</b>	<b>109</b>	<b>110</b>
100°	209	226	241	243



### PANNELLO DI CONTROLLO - CONTROL PANEL

	Alimentazione Powered
	In Funzionamento Operating
	Deposito Pieno/Lavaggio Storage Full / Washing
	Allarme Alarm
	Allarme Alta Pressione High Pressure Alarm
	Pulsante Reset/Lavaggio Button Reset/Washing




### DIMENSIONI - DIMENSIONS

LxPxH(mm): 560 x 620 x 575  
WxDxH(in): 22" x 24 7/16" x 22 10/16"

### DEPOSITO - SLOPE BIN

D105-D155-D205-D255(KM205-255)





### TIPO GHIACCIO - ICE TYPE

	<b>HALF-LARGE</b> 10 x 29 x 24 - 6 gr <b>265</b> PZ. / CICLO PCS / CYCLE
	<b>DICE</b> 22 x 22 x 24 - 10 gr <b>168</b> PZ. / CICLO PCS / CYCLE
	<b>LARGE</b> 29 x 29 x 24 - 17 gr <b>110</b> PZ. / CICLO PCS / CYCLE

### CONDIZIONI USO-OPERATING REQUIREMENTS




220-240V / 1 / 50Hz R452A GWP=2141

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 BAR (14 PSI)		5 BAR (70 PSI)


Calore espulso - Rejected Heat **1731 W**  
Volume aria - Air Volume **590 m³/h**

Vista frontale  
Front view




AIR COOLED

Vista laterale  
Lateral view






WATER COOLED

Vista superiore  
Top view



TOP VIEW

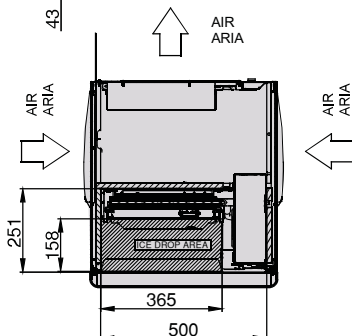

- A** Water drain Ø20 mm
- B** Potable water inlet 3/4 GAS
- C** Electrical cable supply
- D** Water cooled inlet 3/4 GAS
- E** Water cooled outlet 3/4 GAS
- I** ON-OFF Switch (option)
- P** High pressure reset (optional)
- R** Remote connection for condenser fans