















Dati Tecnici - Specifications

	 cond	 comp. W	 ABS. W	 Fuse	 Kwh/100Kg	 I / h	 kg	 Lbs	 kg	 Lbs	 Ton CO2 equiv.
CS54 A ZP		1167	520	10	23.3	4.5	42	93	50	110	0
CS54 W ZP		1167	440	10	20.6	43.4	42	93	50	110	0




Produzione Ghiaccio - Ice Production


Raffreddamento ad aria - Air Cooled Unit

Temp. Aria Air Temp.		Temp. Acqua / Water Temp.			
°C	32°	21°	15°	10°	
°F	90°	70°	60°	50°	
10°	42	49	53	54	
50°	93	108	117	119	
21°	35	41	45	46	
70°	77	90	99	101	
32°	32	38	42	43	
90°	71	84	93	95	
38°	28	34	38	39	
100°	62	75	84	86	


Raffreddamento ad acqua - Water Cooled Unit

Temp. Aria Air Temp.		Temp. Acqua / Water Temp.			
°C	32°	21°	15°	10°	
°F	90°	70°	60°	50°	
10°	48	50	53	54	
50°	106	110	117	119	
21°	44	47	49	51	
70°	97	104	108	112	
32°	42	45	47	49	
90°	93	99	104	108	
38°	40	43	45	47	
100°	88	95	99	104	



Vista frontale
Front view

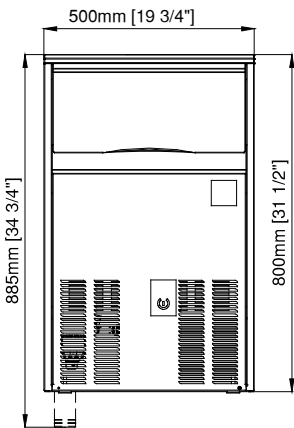

Vista laterale
Lateral view

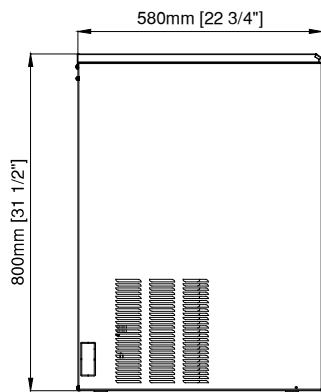

Vista superiore
Top view



Kit 4 Feet Optional
Kit 4 piedini Optional
Ø50mm H100-120 mm

(B) Electrical cable supply / Ingresso alimentazione elettrica

(C) Water outlet connection / Attacco scarico acqua diam. 20 mm


(D) Water outlet connection water condensation / Uscita acqua condensatore ad acqua diam. 20 mm

(E) Water inlet connection / Attacco entrata acqua - 3/4" gas

R290



PANNELLO DI CONTROLLO - CONTROL PANEL




Interruttore capacitivo di start-standby
Capacitive start-standby Switch
Led di stato
Status Led


CAPACITA' DEPOSITO - BIN CAPACITY

22 Kg - 48.5 lbs | 1100 pcs


DIMENSIONI - DIMENSIONS

LxPxH (mm)

 500 x 580 x 800
20" 11/16 x 23" 13/16 x 31" 8/16

 560 x 640 x 960
22" 1/16 x 25" 3/16 x 38" 13/16

TIPO GHIACCIO - ICE TYPE



20g
WEIGHT ICE
PESO GHIACCIO



36
PCS / CYCLE
PZ/CICLO

CONDIZIONI USO-OPERATING REQUIREMENTS

Calore espulso / Rejected Heat 1707 W





Volume aria / Air Volume 310 m³/h



220-240/50/1



R290 GWP = 3

MIN		MAX
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)